



**COELESER SERIES**  
LIQUID/GAS COALESCING

**The Cost Effective Approach to Liquid/Gas Separation**

FMT presents the Industrial Liquid/Gas series of coalescer elements. These elements have been engineered and constructed to provide superior high efficiency sub-micron liquid aerosol coalescence, producing effective separation and removal of liquids from gas streams.

This series of coalescers offers proprietary aerosol interception, liquid coalescence, and liquid drainage layers, co-pleated to ensure a sturdy, high surface area, low pressure drop system.

FMT's unique **pleated** micro-fiber media ensures efficient separation of liquid aerosols from gas streams while minimizing fluid retention.

**FEATURES/BENEFITS**

- Separation Efficiencies of 99% & 99.98% for Medium and High Efficiency Process Requirements
- Low Pressure Drop Materials/Construction for more Efficient, Cost Effective Liquid Aerosol Separations
- Customized Configurations Available for New and Existing Vessels & Design Requirements to Exceed Stringent Process Design Specifications

**PROCESS SYSTEMS**

- Amine/Glycol Feed and Discharge Gasses
- Compressor Suction and Discharge Gasses
- Fuel Gas Purification and Concentration
- Protection of Molecular Sieves, Membranes, Alumina Beds, Activated Carbon Beds, Flares, and Gas Flow Metering Systems

**LIQUID AEROSOLS**

- Compressor Lubrication Oils, Amines, Glycols, Water, Solvents, Completion Fluids, Hydrocarbons, and Brine

Micron Rating	99.98% Efficiency Code	99.00% Efficiency Code
0.1 Micron	001	001A
0.3 Micron	003	003A



**FMT-LGC-28**  
**Liquid/Gas Series**

**FMT-LGC-28 Series**

- Dimensions:** 2.75" OD x 1.5" ID x 30" long
- Media:** Micro Fiberglass, Nylon, or Polyester
- Micron Ratings:** 0.1 & 0.3 micron @ 99.0% & 99.98%
- Gaskets:** Buna-N, EPDM, TEV, or Viton®
- Construction:** DOE, Tinned Steel or 304 SS End Caps/Internals
- Compatibility:** Standard or Amine/H<sub>2</sub>S Compatible



**Filtration & Membrane Technology, Inc.**  
8342 Silvan Wind  
Houston, Texas 7704  
**Phone: 713-870-1120**  
**Fax: 713-422-2533**  
E-Mail: [fmt-houston@att.net](mailto:fmt-houston@att.net)  
Web: [www.fmt-houston.com](http://www.fmt-houston.com)



**COELESER SERIES**  
LIQUID/GAS COALESCING

*The Cost Effective Approach to Liquid/Gas Separation*

**L/G COALESCER CODING**

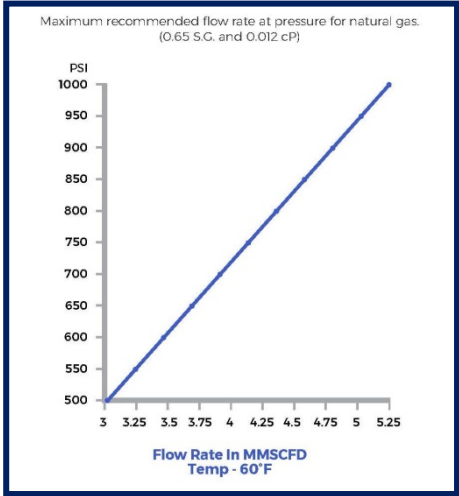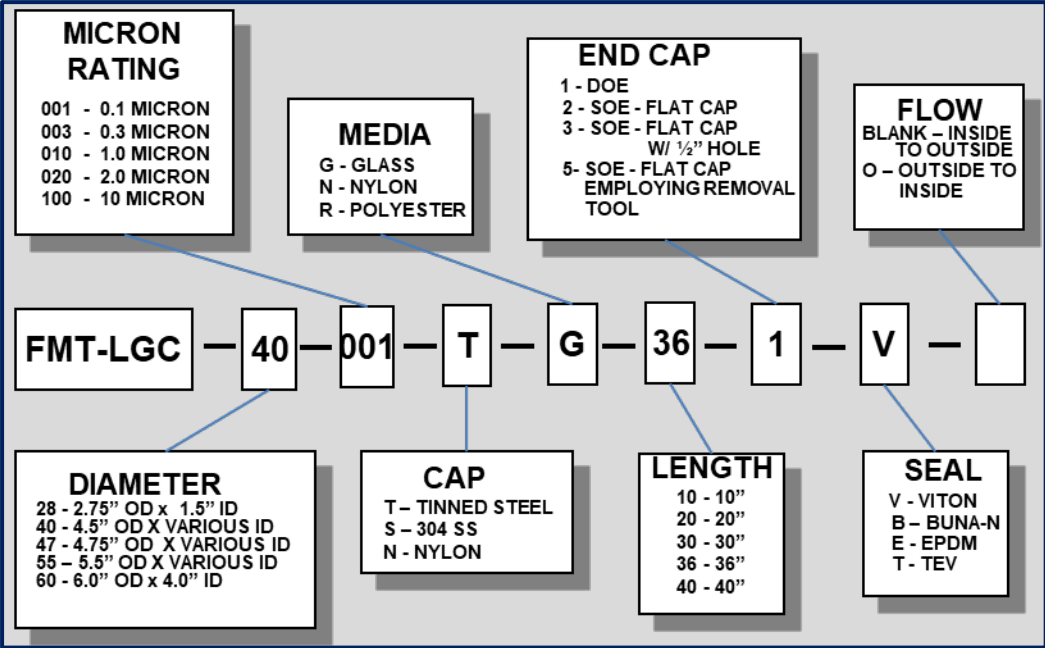

**Maximum Operating Temperature: 200F**

**Clean Pressure Drop , <2 PSI**

**Changeout Pressure Drop, 15 PSI**

**Normal Flow Path: Inside-To-Outside**

**Liquid Loading Up To 0.06 GPM/Element**

**Filtration & Membrane Technology, Inc.**  
8342 Silvan Wind  
Houston, Texas 7704  
Phone: 713-870-1120  
Fax: 713-422-2533  
E-Mail: [fmt-houston@att.net](mailto:fmt-houston@att.net)  
Web: [www.fmt-houston.com](http://www.fmt-houston.com)

Notice: The information presented here is based on tests and data which FMT believes to be reliable, but their accuracy or completeness is not guaranteed. FMT MAKES NO WARRANTIES, EXPRESS OR IMPLIED, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. The determination of whether the FMT product is fit for a particular purpose or application is the responsibility of the user. Coalescer element testing is based upon ISO 12500 standards.