



PLATINUM SELECT SERIES

700 STYLE CARTRIDGE

The Most Cost Effective Approach to Quality Filtration

Filtration & membrane Technology introduces its next generation of 700 style cartridges, the PLATINUM SELECT SERIES.

The original FMT 700 style Platinum Design has been re-engineered to provide a greater range of micron ratings and more dirt holding capacity.


The introduction of a specific pre-filtration depth media, in conjunction with more efficient flow channels and flow chambers, provides amazing results. This combination optimizes the effective filtration surface area of the pleated filter media while maximizing dirt holding capacity.

Available in a wide variety of filter media, these next generation cartridges can be constructed with metal or non-polypropylene components for applications that involve higher temperatures.

The FMT PLATINUM SELECT standard cartridge is constructed from FDA approved polypropylene components with a recommended flow rate of 40 GPM and a 35 PSI change out differential pressure. It is the solution to achieving optimum filtration performance while minimizing costs.



CLEAN PRESSURE DROP

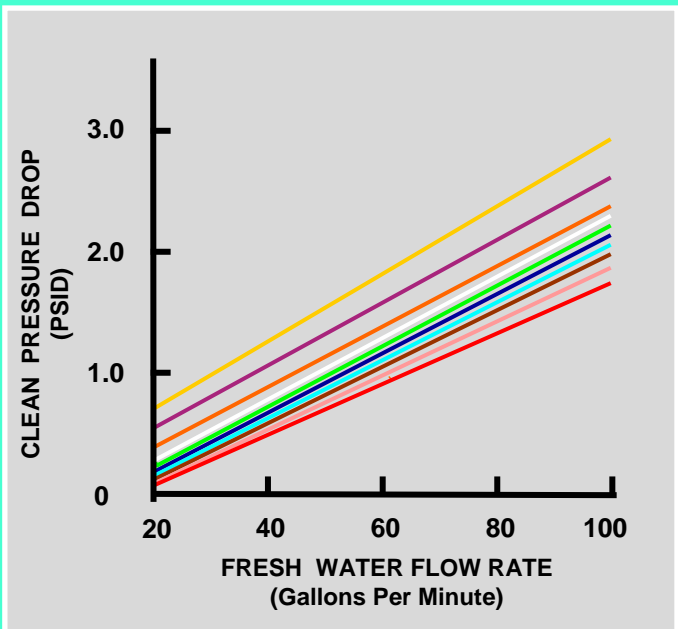

DIRT HOLDING CAPACITY

FILTER CODE	POUNDS OF SOLIDS (38" L)	
	POLYPRO	CELLULOSE
C	N A	N A
D	15.0	N A
E	17.2	N A
F	18.5	14.9
G	18.7	15.0
H	19.0	16.5
J	19.1	17.8
K	19.3	18.0
L	18.3	20.6
M	20.4	N A
N	20.4	N A

BETA RATIO EXPLANATION

$$\text{Beta Ratio @ micron rating (x)} = \beta_x$$

$$\beta_x = \frac{\text{IPC}}{\text{EPC}}$$

IPC = Influent Particle Count
EPC = Effluent Particle Count

BETA RATIO / EFFICIENCY	
Beta Ratio	Removal Efficiency
100	99.00%
1000	99.90%
5000	99.98%

FILTER EFFICIENCY

FILTER CODE	MICRON RATING	
	@ 99%	@ 99.98%
C	0.1	0.3
D	0.3	0.5
E	1.0	2.0
F	2.0	5.0
G	5.0	10.0
H	10.0	20.0
J	15.0	30.0
K	25.0	40.0
L	40.0	70.0
M	70.0	100.0
N	100.0	135.0

CARTRIDGE CODING

PLATINUM
SELECT
CARTRIDGE
SERIES

NON-MEDIA
COMPONENTS

P = 100% FDA Polypropylene
M = Carbon Steel Components
S = 304 Stainless Components

FILTER MEDIA

C = Cellulose
G = Glass
N = Nylon
P = Polypropylene
R = Polyester

O-RING SEAL

B = Buna
E = EDPM
V = Viton

F M T

7 4 E

P P 4 0 6 E

FILTER STYLE

74 = 740 Style
72 = 720 Style
FM = Max-Out Style

FILTER
EFFICIENCY

E = 2.0 Micron
@ 99.98%

FILTER
LENGTH

40 = 38"
30 = 30"
28 = 28"
20 = 20"

O-RING SIZE

3 = 335
5 = 3M Seal
6 = 226
8 = 228 (Max-Out)

Notice: The information presented here is based on tests and data which FMT believes to be reliable, but their accuracy or completeness is not guaranteed. FMT MAKES NO WARRANTIES, EXPRESS OR IMPLIED, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. The determination of whether the FMT product is fit for a particular purpose or application is the responsibility of the user.



FORM PSS-700 08/11

Filtration & Membrane Technology, Inc.

8342 Silvan Wind
Houston, Texas 7704
Phone: 713-870-1120
Fax: 713-422-2533

www.fmt-houston.com