

The Most Cost Effective Approach to Quality Filtration

Filtration & Membrane Technology Inc. (FMT) introduces its next generation of Pleated Bag filters, the 650 MAXIMUM CAPACITY style bag.

The original FMT Platinum 650 style bag has been re-engineered to provide a greater range of micron ratings and more dirt holding capacity.


The combination of a specific pre-filtration depth media and more efficient flow channels optimizes the effective filtration surface area of the pleated filter media while maximizing its dirt holding capacity.

These next generation pleated bags are constructed with polypropylene components and are available in a wide variety of filter media.

FMT's MAXIMUM CAPACITY style bag is constructed from absolute rated media. Recommended flow rate is 25 GPM for the 20" length and 35 GPM for 26" length and 25 PSID change out. These are the solution to achieving optimum filtration performance while minimizing costs.



CLEAN PRESSURE DROP

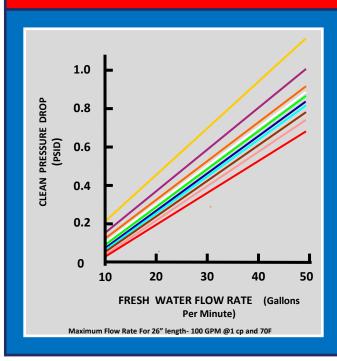

DIRT HOLDING CAPACITY

FILTER	POUNDS OF SOLIDS (26" L)	
CODE	POLYPRO	
С	N/A	
D	16.5	
E	18.9	
F	21.5	
G	21.6	
Н	22.0	
J	22.4	
K	23.1	
L	24.3	
M	24.5	
N	24.7	

BETA RATIO EXPLANATION

Beta Ratio @ micron rating (x) =
$$\beta_x$$

$$\beta_x = \frac{IPC}{EPC}$$

IPC = Influent Particle Count EPC = Effluent Particle Count

BETA RATIO / EFFICIENCY		
Beta Ratio	Removal Efficiency	
100	99.00%	
1000	99.90%	
5000	99.98%	

FILTER EFFICIENCY

FILTER	MICRON RATING	
CODE	@ 99%	@ 99.98%
С	0.1	0.3
D	0.3	0.5
E	1.0	2.0
F	2.0	5.0
G	5.0	10.0
Н	10.0	20.0
J	15.0	30.0
K	25.0	40.0
L	40.0	70.0
M	70.0	100.0
N	100.0	135.0

CARTRIDGE CODING

MAXIMUM CAPACITY BAG SERIES

NON-MEDIA COMPONENTS

P = 100% FDA Polypropylene

FILTER MEDIA

G = Glass

N = Nylon

P

P = Polypropylene

P

2

0

R = Polyester

BAG SEAL

1 = Rosedale

5 = 3M

E

G = Plenty

HM = Hayward

U = Universal

F M T

65 = 650 Style

6 5 E

FILTER

EFFICIENCY

E = 2.0 Microns

@ 99.98%

FILTER LENGTH

20 = 20"

26 = 26"

O-RING SEAL

B = Buna

E = EDPM

V = Viton

Notice: The information presented here is based on tests and data which FMT believes to be reliable, but their accuracy or completeness is not guaranteed. FMT MAKES NO WARRANTIES, EXPRESS OR IMPLIED, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. The determination of whether the FMT product is fit for a particular purpose or application is the responsibility of the user.

FORM FMC - 650 02/21



FILTER STYLE

Filtration & Membrane Technology, Inc.

U

8342 Silvan Wind Houston, Texas 7704 Phone: 713-870-1120 Fax: 713-422-2533

www.fmt-houston.com