




940 SINGLE SKID INDUSTRIAL APPLICATIONS

HIGH CAPACITY FILTRATION WITH MINIMUM SPACE REQUIREMENTS

150 GPM CAPACITY

- SKID: 3'W x 4'L x 7'H
- WEIGHT: 750 Pounds
- 316 Stainless Steel
- 150 PSI ASME Code
- 3" PIPING

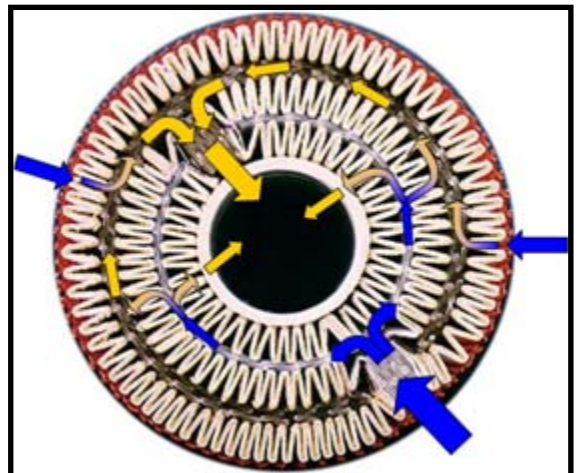


The Cost Effective Approach to Quality Filtration

FMT introduces its 940 PLATINUM Series absolute rated filter cartridge.

This unique design, U.S. Patent No. 5824232, uses segregated flow channels and flow chambers to maximize the effective surface area of the pleated filter media within a 12.75 inch OD cartridge. Combining this design with the technique of pleating several different filter media together in a single pleat pack maximizes dirt holding capacity.

One 940 PLATINUM Series filter is designed to have the dirt holding capacity of 200 string wound or 50 standard 2.5 inch OD pleated cartridges of similar length. Available in a wide variety of filter media, this cartridge is constructed with metal end caps and core for high temperature applications.

With a recommended flow rate up to 150 GPM, this FMT PLATINUM Series system is the solution to achieving optimum performance while minimizing filtration costs.

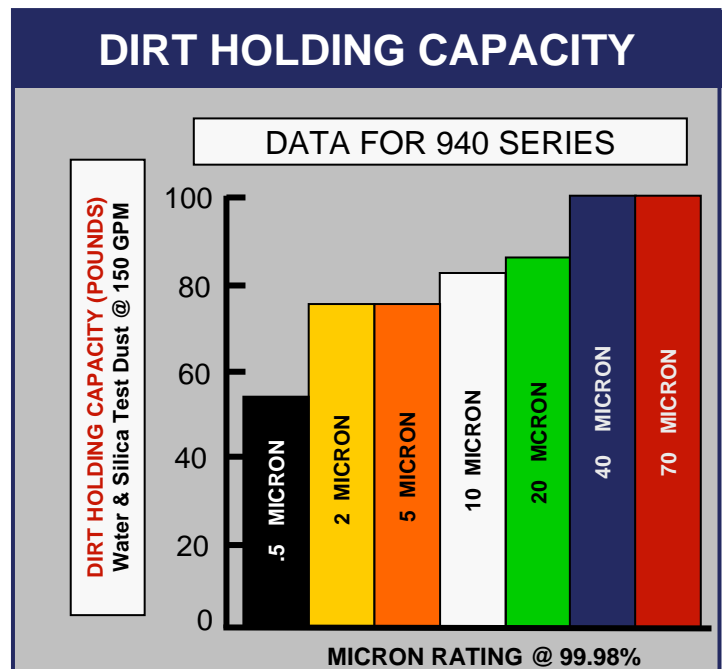

Notice: The information presented here is based on tests and data which FMT believes to be reliable, but their accuracy or completeness is not guaranteed. FMT MAKES NO WARRANTIES, EXPRESS OR IMPLIED, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. The determination of whether the FMT product is fit for a particular purpose or application is the responsibility of the user.

FORM PSE-940R 08/11



Filtration & Membrane Technology, Inc.

8342 Silvan Wind

Houston, Texas 7704

Phone: 713-870-1120

Fax: 713-422-2533

www.fmt-houston.com