



740 SINGLE VESSEL INDUSTRIAL APPLICATIONS

MEDIUM CAPACITY FILTRATION WITH MINIMUM SPACE REQUIREMENTS RENTAL OR PURCHASE

40-80 GPM CAPACITY

- [Accepts All FMT Platinum 700 Series Filters](#)
- [Accepts 740 Guzzler Oil Absorption Filter](#)
- Dual Purpose-Particulates or Oil Removal
- 8.6" OD x 68" H Inc. Legs
- WEIGHT: 95 Pounds
- 316 Stainless Steel
- 150 PSI ASME Code
- 2" RF Flanges
- 1/4" NPT Gauge Ports & 1/2" NPT Drain/Vent
- 740 Style 226 Cartridge Receiver Built-In
- Rentals do not include Gauges or Valves.
- Inlet/Outlet and Drains/Vent Are Clearly Labeled.



The Cost Effective Approach to Quality Filtration

One 700 PLATINUM Series filter is designed to have the dirt holding capacity of 10 standard 2.5 inch OD pleated cartridges of similar length. Available in a wide variety of filter media, this cartridge can be constructed with metal end caps and core for high temperature applications.


With a recommended flow rate of 40 GPM, this FMT PLATINUM Series filter is the solution to achieving optimum performance while minimizing filtration costs.

One 740 "OIL GUZZLER" is designed to hold greater than six liters of oil before reaching the maximum differential pressure of 35 PSI. The built in flow cutoff mechanism provides a positive indication of cartridge change-out time prior to any oil bypass.

With a recommended maximum flow rate of 15 GPM, the FMT "OIL GUZZLER" cartridge is the optimal solution for eliminating oil from water at minimal cost in single pass filtration


DIRT HOLDING CAPACITY

DATA FOR FMT-700 SERIES
POLYPROPYLENE MEDIA

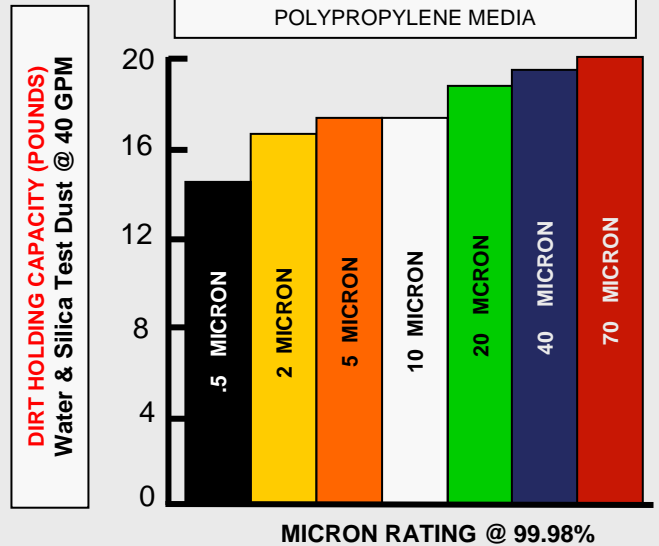

OIL HOLDING CAPACITY

DATA FOR 740 "OIL GUZZLER"
OIL CHALLENGE OF 200 PPM WITH
LESS THAN 5 PPM OIL EFFLUENT

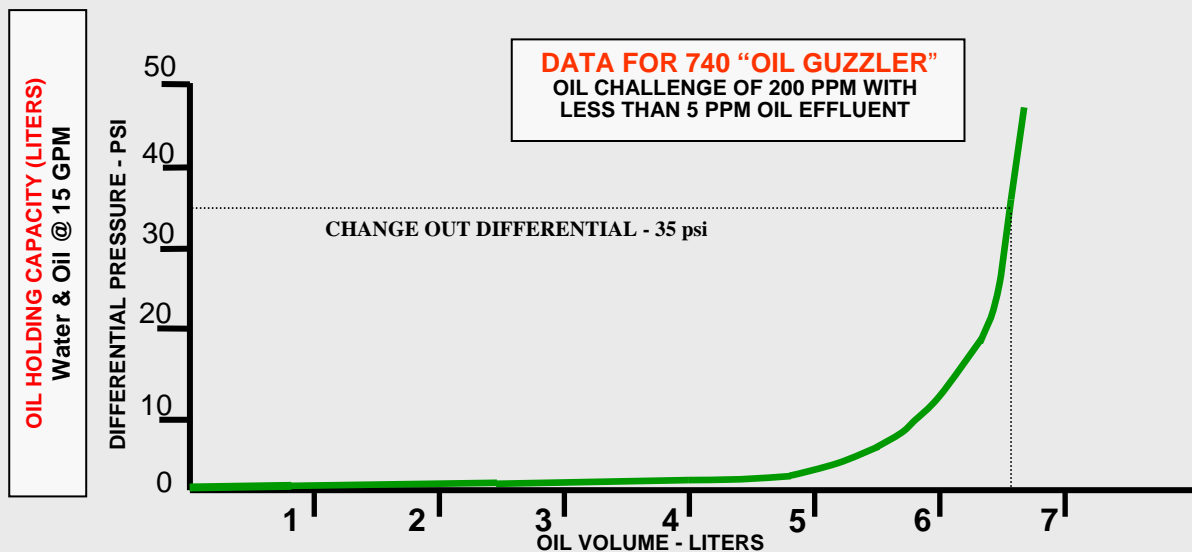

Notice: The information presented here is based on tests and data which FMT believes to be reliable, but their accuracy or completeness is not guaranteed. FMT MAKES NO WARRANTIES, EXPRESS OR IMPLIED, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. The determination of whether the FMT product is fit for a particular purpose or application is the responsibility of the user.

FORM PSE-740 02/12



Filtration & Membrane Technology, Inc.

8342 Silvan Wind

Houston, Texas 7704

Phone: 713-870-1120

Fax: 713-422-2533

www.fmt-houston.com