

Modify 2.5" Cartridge Vessels



740 SERIES:

- 6.25" OD x 38" Nominal Length Filter cartridge
- Up to 130 sq. feet of filter media
- Replaces up to 10 standard 2.5" OD pleated cartridges or 40 string wound in dirt holding capacity
- Recommended flow rate up to 40 GPM
- Dirt holding capacity - up to 20 pounds

940 SERIES:

- 12.75" OD x 38" Nominal Length Filter Cartridge
- Up to 330 sq. feet of filter media
- Replaces up to 50 standard 2.5" OD pleated cartridges or 200 string wound in dirt holding capacity
- Recommended flow rate up to 150 GPM
- Dirt holding capacity - up to 100 pounds



2040 SERIES:


- 20.0" OD x 38" Nominal Length Filter Cartridge
- Up to 950 sq. feet of filter media
- Replaces up to 150 standard 2.5" OD pleated cartridges or 600 string wound in dirt holding capacity
- Recommended flow rate up to 450 GPM
- Dirt holding capacity - up to 300 pounds



7-6.25" OD 740 Filters Replace 50-2.5" OD Filters Increased Solids Holding By 100%


CONVERT YOUR EXISTING HOUSINGS:

- SAVE ON CARTRIDGE CHANGING TIME
- INCREASE FILTER LIFE WITH MORE MEDIA
- CONVERT EXISTING VESSELS WITHOUT REMOVING OR CODE CHANGE

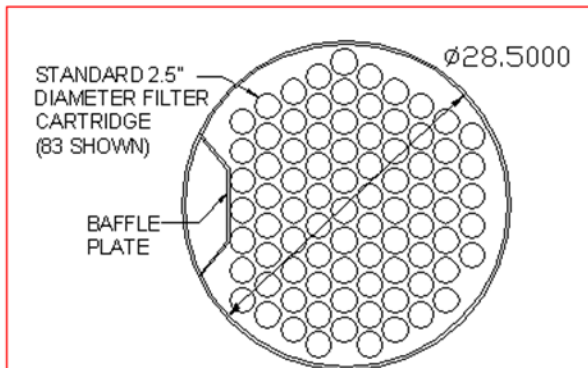

EXISTING SUMP PLATE LAYOUT WITH STANDARD CARTRIDGES

Up to 166 pounds of Dirt Holding Capacity with Pleated Media

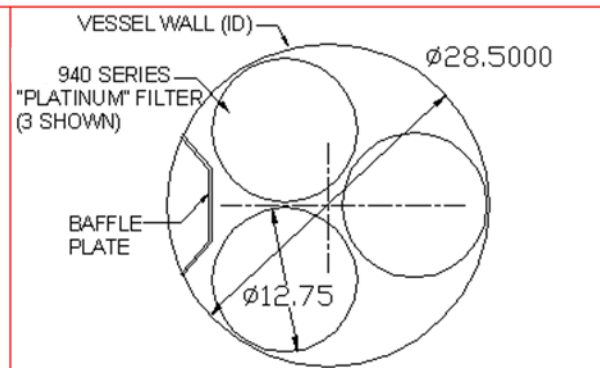

MODIFIED SUMP PLATE LAYOUT WITH "PLATINUM" PLACEMENT

Up to 300 pounds of Dirt Holding Capacity with Pleated Media

Notice: The information presented here is based on tests and data which FMT believes to be reliable, but their accuracy or completeness is not guaranteed. FMT MAKES NO WARRANTIES, EXPRESS OR IMPLIED, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. The determination of whether the FMT product is fit for a particular purpose or application is the responsibility of the user.



FORM Conv-Vessel-3 05/09

Filtration & Membrane Technology, Inc.

8342 Silvan Wind
Houston, Texas 7704
713-870-1120

www.fmt-houston.com